

LINEA 60/100




| | |
|------------------------|-------------------------------------|
| Colours | Plastic/ Opal cover |
| Housing | Track light |
| Fixture type | CREE LED |
| Module | Driver incorporated in housing |
| Driver | 1500lm (Linea60), 2500lm (Linea100) |
| Light Output module | 3000K, 4000K |
| CCT | >80Ra |
| CRI | 120° |
| Beam angles | Powergear® 3-phase adapter included |
| Adapter | 0° |
| Rotatable | 0° |
| Tilttable | Standard |
| LED modules | N/A |
| Dimming Options | 35.000h (L70/B30) |
| Expected Lifetime | RG1 unlimited |
| Photobiological safety | > 0.9 |
| Power factor | 3 SDCM |
| Colour consistency | 3 years warranty |
| Warranty | |

| Net Weight | Dimensions carton L x W x H | Qty outer carton |
|------------|-----------------------------|------------------|
| 500 grams | Ø 80 X 73 cm | 20 |
| 750 grams | Ø 80 X 113 cm | 20 |

Available LED Modules



| Description | Lumen | Watt | Lm/W | CCT | CRI | Description | Lumen | Watt | Lm/W | CCT | CRI |
|-------------|--------|------|------|----------|-----|-------------|-------|------|------|-----|-----|
| CREE LED | 1500lm | 20W | 75 | 830, 840 | >80 | | | | | | |
| CREE LED | 2500lm | 30W | 83 | 830, 840 | >80 | | | | | | |

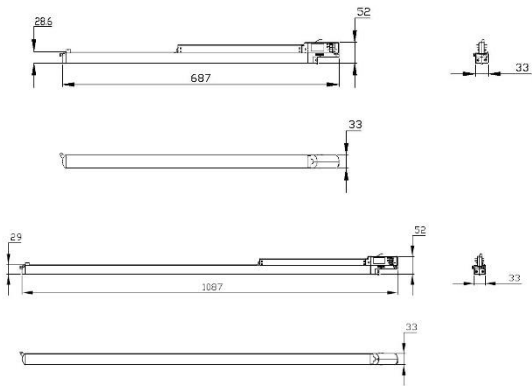

LED modules
Standard: CRI>80 and >90 in CCT 2700K, 3000K, 4000K
Premium White (PW): for fresh white and depth of colour in retail environments
1) Lumen output of LED module (COB)
2) Mentioned wattage applies for the COB only. Mentioned wattage applies for the most efficient CCT.
The power of the complete fixture will be slightly higher due to the power consumption of the driver.
3) Values shown are average values and are subject to +/- 10% tolerance (set by international standards). The colour temperature is subject to a tolerance of up to +/- 150 Kelvin compared to the nominal value.
Technical data can be changed by Internova without prior notice.