

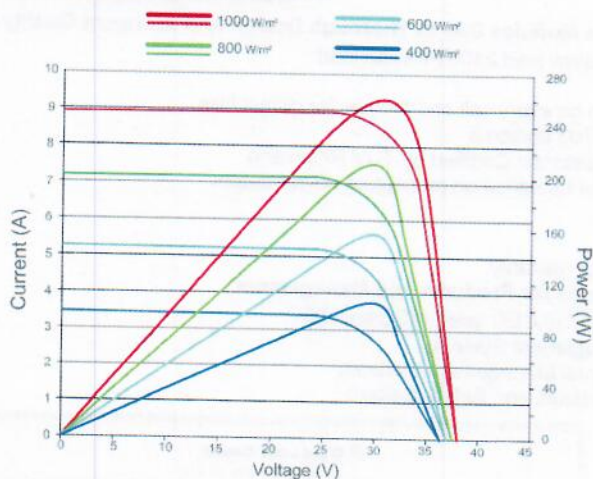
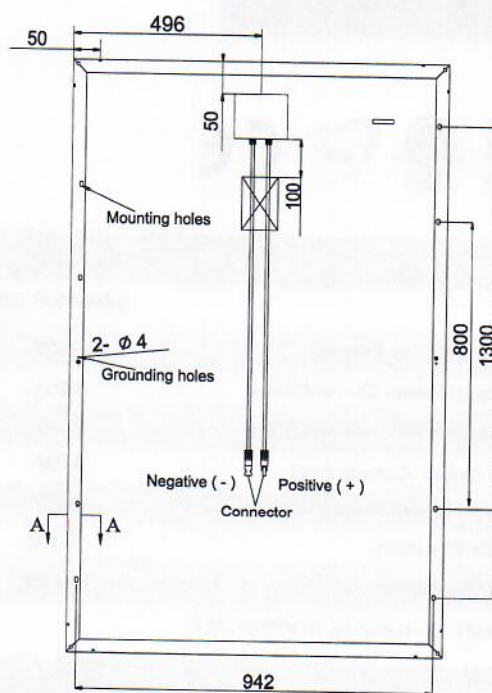
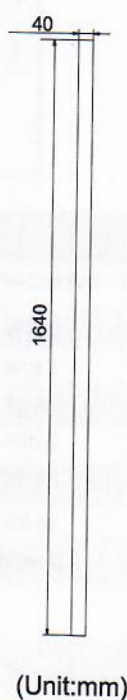


I-V Curves at Different Irradiances(260W)
Test temperature: 25°C

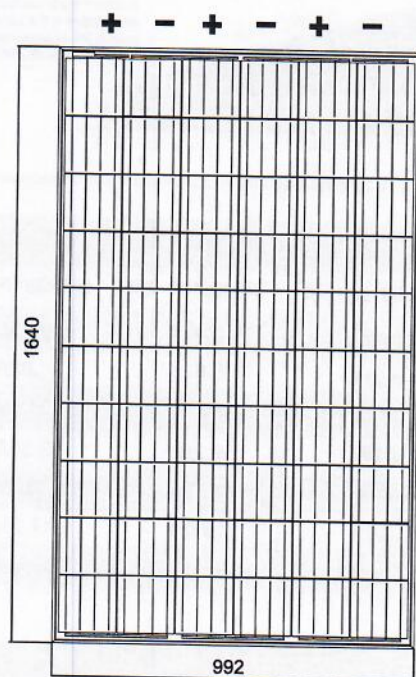


Irradiance: AM1.5, 1000W/m²(260W)

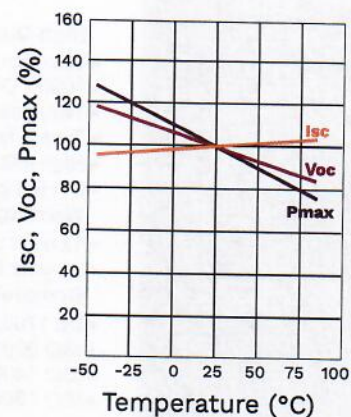

(Unit:mm)

Mechanical Characteristics

Solar Cell	Polycrystalline 156x156 mm ,60(6x10) pcs in series
Glass	High transparency, low iron, tempered glass 3.2mm
Frame	Anodized aluminum alloy
Junction Box	IP67 rated, with 3 bypass diode
Output cable	4 mm²(EU)/1100/1200mm long
Connector	MC4 compatible
Dimension	1640x992x40 mm
Weight	18.5KG



Thermal Characteristics

Pmax Temperature Coefficient	-0.41%/K
Voc Temperature Coefficient	-0.31%/K
Isc Temperature Coefficient	+0.05%/K
NOCT	45±2°C